


EMERGENCY BATTERY BACK-UP POWER SUPPLIES

Winkle Industries' emergency battery back-up power supplies are designed to guard against property damage and personal injuries caused by power failures. These systems supply instantaneous power to electro-magnets and allow necessary time for magnet loads to be safely lowered until normal power is restored.

Standard Features:

- Nema 1 ventilated battery enclosures
- Nema 12 control enclosures
- Industrial duty battery chargers
- Special solid state voltage transfer circuits
- Voltage disconnect kniveswitches
- Power failure warning devices
- Heavy-duty sealed lead acid batteries
- 77° Fahrenheit normal operating temperatures
- Voltage and amperage monitoring meters
- Cab mounted meter packages

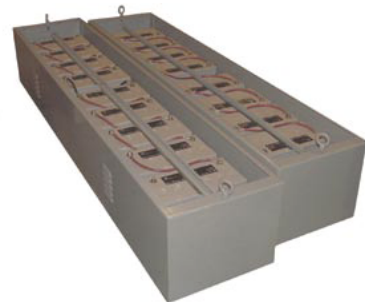

SPECIFICATIONS

Winkle Part Number	Charger Input Voltage	Output Voltage	Output Rated Amps	Battery Charger Amps	Approximate System Weight (lbs.)	Approximate Overall Dimensions (inches)		
						Battery Boxes	Charger	Control Circuit
WI-EBPS-30-60	460/1/60	230 VDC	30 for 60 minutes	6	1730	1) 60 X 57 X 14	38 x 21 x 15	36 x 24 x 10
WI-EBPS-60-30	460/1/60	230 VDC	60 for 30 minutes	6	1900	1) 82 x 14 x 17 1) 72 x 14 x 17	38 x 21 x 15	36 x 24 x 10
WI-EBPS-120-30	460/1/60	230 VDC	120 for 30 minutes	6	2100	1) 82 x 14 x 17 1) 72 x 14 x 17	38 x 21 x 15	36 x 24 x 10

Optional Features:

- Custom enclosure sizes to fit any application
- Output voltages of 125 VDC

Contact Winkle Industries to receive an engineered solution for your specific battery back-up requirement.

Engineered for end-to-end productivity

2080 West Main Street, Alliance, Ohio 44601
 Tel: 330-823-9730 Fax: 330-823-9788
www.winkleindustries.com